

Vivitek DU7199Z+ BK/WH

VIVITEK DU7199Z+ BK/WH



A brief introduction to the DU7199Z+ BK/WH: the Vivitek stationary 3D laser DLP projector offers 9000 ANSI lumens, a contrast of 3000000:1 and a WUXGA 1920 x 1200 resolution. The manufacturer states a laser lifespan of 200,000 hours, which would be the equivalent of 13.7 years at 4 hours a day. The built-in lens shift and keystone correction function provides freedom when adjusting the projection. The brightness of 9,000 ANSI lumens makes a screen width of 964 cm possible. The projector can also handle slightly brighter rooms with a smaller image width (we recommend max. 643 cm). Furthermore, the projector can play 1080P and 4K (compressed) as well as 3D without any problems, and thus all currently available Blu-ray formats can be recognised by the projector.

Brief Introduction Beta 2.5

Display Type

1 x 0,67" DMD DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

9000

4000 Lux (bei 200 cm Screen)

Contrast

3000000:1

3000000:1

Black Level

0,0030 min. Lumen

0,001 min. Lumen

Lens shift

Vert.: +70% -50% Hori.: +/-15%

Resolution

WUXGA 1920 x 1200

2.304.000 Pixel

Video Modes

UHD (4K2K) 3840 x 2160 compressed

3D Compatibility

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

Laser

Light Life

20000 h. / 30000 h. in Eco Mode

Operating Costs

0,00 € Laser

Focus

Manual

Zoom

Manual 1,25

Objective

F=2,02-2,4 f=22,84-28,61 mm

Throw Ratio

1,54-1,93:1

Audio


2 x 10W

Connections

2 x HDMI 2.0 in

DVI-D in

D-sub 15pin in und out

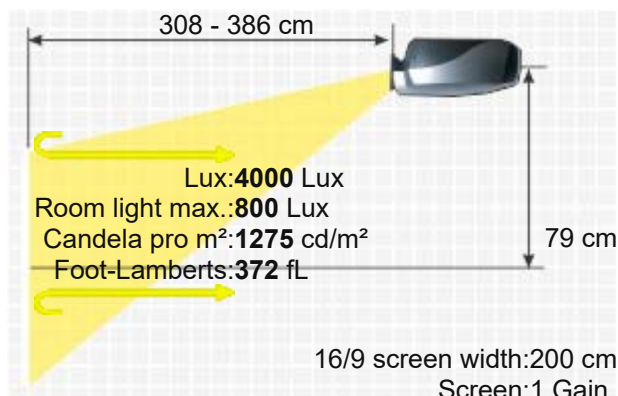

Mini Jack Audio in und out
Cinch Stereo in
3D Sync-in (VESA) x1
3D Sync-in Out (VESA) x1
USB Typ A in
RS232C Din 9 pin in und out
RJ45 in
HDBaseT in
12V Trigger out




Ceiling Mounting Yes
Power 540W
Size WxHxD 470 x 202 x 517 mm (18,5"x8"x20,4") 49,08 L/dm³
Operating Noise 40 / 38 dB in Eco Mode

Weight 20,60 kg / 44,09 lbs.
Keystone Vert.: +/-30°
Hori.: +/-30°
Illumination -

Frequenz H-sync: 15,31-91,4 kHz
V-sync: 24-120 Hz

Foot-Lamberts 372 fL / max. 964 cm screen width
1275 cd/m²

- Features
- Real Full HD 3D
 - Full HD 1080P compatible
 - Lens shift Funktion
 - Eco Mode
 - Kensington Slot
 - 360° installable
 - 24/7 continuous operation capable
 - Lan network compatible.

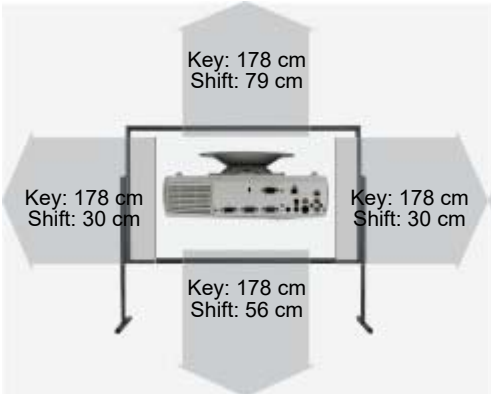

Optionaler Zubehör

	Fernbedienung mit Laserpointer	5041841300	31,39 €
	Deckenhalterung Länge 225 mm	Halterung45	85,80 €

Optional Lenses

Status 2024 Current model // Last update of the data: 2024-12-16
Data Created: 2024-12-09 12:50:26

More Details



HCinema

<https://www.projector-database.com/pro/vivitekdu7199zplus-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.