

Vivitek LU1165P

VIVITEK LU1165P



The Vivitek LU1165P stationary 3D laser DLP projector has 8000 Ansi lumens, a contrast of 150000:1 and a WUXGA 1920 x 1200 resolution. The manufacturer specifies a laser service life of 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. The integrated lens shift gives freedom when positioning the projector. An image width of up to 909 cm is possible as the projector has 8000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 606 cm. The projector can also play 1080P and 3D without any problems. On the market since 2022, the model is no longer offered by the manufacturer Vivitek.

Brief Introduction

Beta 2.5

Display Type



1 x 0,67" DMD DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 8000

Screen 3556 Lux (bei 200 cm Screen)

Contrast

150000:1 full on/off

Screen 150000:1 full on/off

Black Level

0,0533 min. Lumen

Screen 0,024 min. Lumen

Lens shift

Vert.: +55% -15% Hori.: +/-5%

Resolution

WUXGA 1920 x 1200

2.304.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

Laser Phosphor

Light Life

20000 h.

Operating Costs

0,00 € Laser

Focus

Manual

Zoom

Manual x1,25

Objective

F=2,0-2,09 f=22,82-28,5 mm

Throw Ratio


1,54-1,93:1

Audio

2 x 10W

Connections

2x HDMI in
3D-Sync Out
D-sub 15pin in
Cinch Video in
Cinch Stereo in
Mini Jack Audio in und out
Kabelgebundene Fernbedienung in und out

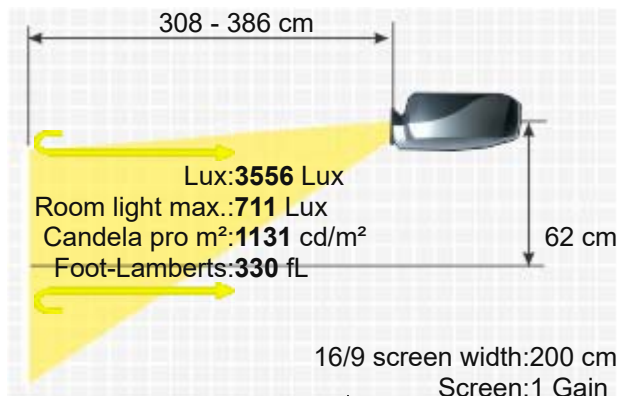


USB-A in
USB-B in
RS232C Din 9 pin in
RJ45 in
Ceiling Mounting Yes
Power 830W / 640W in Eco Mode
Size WxHxD 517 x 202 x 470 mm (20,4"x8"x18,5") 49,08 L/dm³
Operating Noise 33 / 30 dB in Eco Mode

Weight 25,00 kg / 55,12 lbs.
Keystone Vert.: +/-25°
Hori.: +/-30°
Illumination -
Frequenz H-sync: 15,31-91,4 kHz
V-sync: 47-120 Hz
Foot-Lamberts 330 fL / max. 909 cm screen width
1131 cd/m²
Features


- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- 24/7 continuous operation capable
- Lan network compatible.

Optional
Object lens original 5811120865-SVV / VL906G
Object lens original 5811119237-SVV / VL908G
Order here: <https://www.hcinema.de/lampen/shop-en.php?id=hc1468>

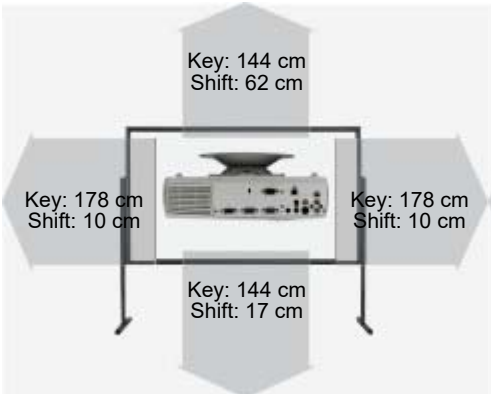

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
VL912G:1.25-1.6	1.25-1.6:1	2.5-3.2 m	55-15%	+/-5%	Manual
VL911G:0.77-1.1	0.77-1.1:1	1.5-2.2 m	55-15%	+/-5%	Manual
VL909G:3.0-5.0	3-5:1	6-10 m	55-15%	+/-5%	Manual
VL908G:1.93-2.9:1	1.93-2.9:1	3.9-5.8 m	55-15%	+/-5%	Manual
VL907G:1.1-1.3	1.1-1.3:1	2.2-2.6 m	55-15%	+/-5%	Manual
VL906G:1.54-1.93:1	1.54-1.93:1	3.1-3.9 m	55-15%	+/-5%	Manual
Fix Optional Lenses					
VL904G:0.77:1	0.77:1	1.5 m	55-15%	+/-5%	No Zoom

Status 2022 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



<https://www.projector-database.com/pro/viviteklu1165p-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.